




PUMP MONITOR RELAY - PMR2

Application Note For Sensor Input Noise Suppression Using a Choke

DESCRIPTION

In applications where Variable Frequency Drives or Soft Start Starters are used, a Choke may be required on the sensor input to the PMR2 to filter excessive electrical noise generated by the Pump Motor Leads.

The sensor input signal is connected so that it goes through the Choke as shown below.

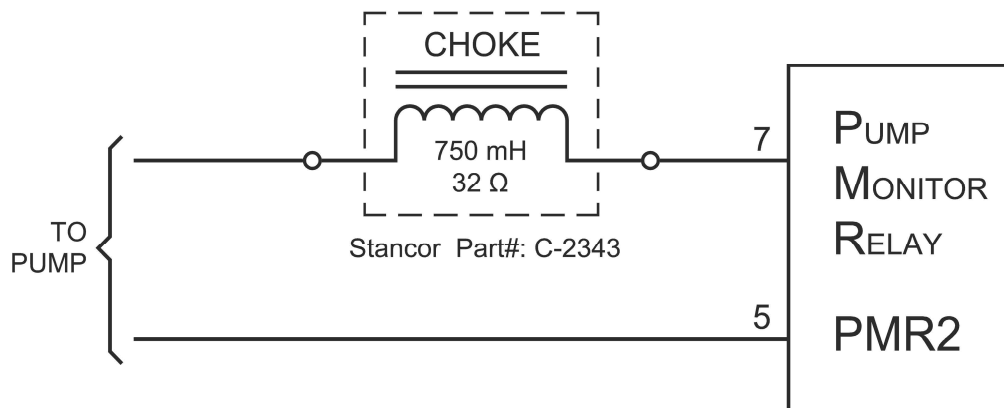

The recommended Choke for this application is the:

Stancor Part#: C-2343

Available From: Allied Electronics
PH: (866) 433-5722
Website: www.alliedelec.com

Online Components
Website: www.onlinecomponents.com

